


# TECHNICAL DATASHEET



10069, 10072, 10076

Anura RJ45-EtherCON CAT6<sub>A</sub>

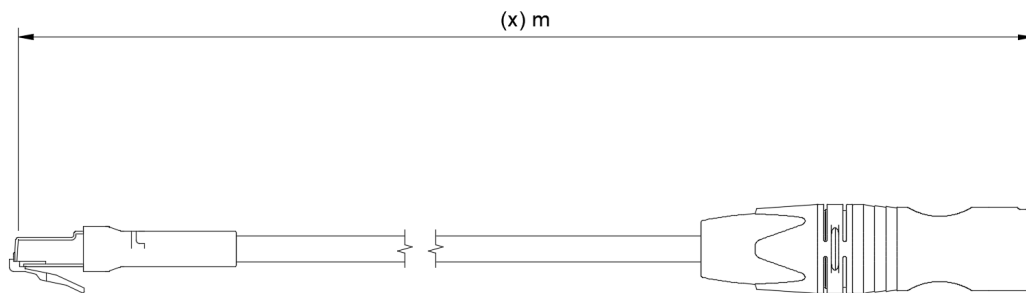

<b>SPECIFICATION.....</b>	<b>3</b>
Anura Network Cable.....	3
Connector A:.....	3
Connector B:.....	3
EtherCON IP Rating:.....	3
Cable Category:.....	3
Cable Type:.....	3
Mechanical Specifications.....	3
Cable Length:.....	3
Jacket Material:.....	3
Jacket Color:.....	3
Cable Outer Diameter:.....	3
Bend Radius:.....	4
Operating Temperature Range:.....	4
Typical weight:.....	4
Minimum bending radius:.....	4
Contact.....	4

# SPECIFICATION

## Anura Network Cable

Industrial Ethernet cable for use with 10064, Anura Transceiver.

RJ45 to etherCON CAT6a.

Shielded S/UTP cable with cable plug carrier offering a robust metal shell and Push-Pull locking system.

**Connector A:**

Shielded RJ45 (449150021, Molex)

**Connector B:**

Shielded RJ45 (449150021, Molex)

**EtherCON IP Rating:**

IP65 when mated with NE8FDX-\*6-W.

**Cable Category:**

Cat5e

**Cable Type:**

Shielded S/UTP cable, 4 x 2 x AWG26/19

## Mechanical Specifications

**Cable Length:**

10069: 10m

10072: 30m

10076: 50m

**Jacket Material:**

PUR

**Jacket Color:**

Blue (similar to RAL 5021)

**Cable Outer Diameter:**

6.3 mm

**Bend Radius:**

Fixed installation: 8 x outer diameter

Flexing: 15 x outer diameter

**Operating Temperature Range:**

-40°C to +80°C

**Typical weight:**

10069: 0.6kg

10072: 1.8kg

10076: 3kg

**Minimum bending radius:**

Fixed installation: 8 x outer diameter

Flexing: 15 x outer diameter

## Contact

Revibe Energy AB

Falkenbergsgatan 3

412 85 Göteborg

Sweden

+46 (0) 31 24 23 22

[www.revibeenergy.com](http://www.revibeenergy.com)